


HIGH POWER BRAZED RESISTOR


2A100300

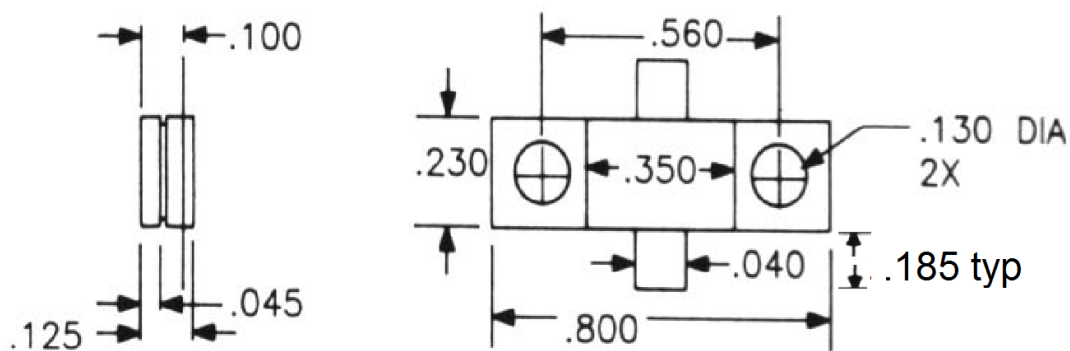

Electrical Specifications		Material Specifications		General Specifications	
RFT P/N	2A100300	Substrate	BeO	Mechanical Tolerance	±.010"
Power (Watt)	100	Flange	Copper with Nickel Plating	Tolerance (dB)	DC - 1 GHz: ± 1 1 - 2 GHz: ± 2
Attenuation (dB)	30	Tab	Nickel with Silver plating	Power Handling	100@ 100°C 0 W @ 250 °C
Frequency (GHz)	2	Cover	Alumina	Construction	Brazed
VSWR	DC - 1 GHz: 1.25:1 1-2 GHz: 1.35:1	Resistive Element	NiChrome	RoHS Compliance	Yes

All dimensions are in inches. Minimum lead length 0.125". Other attenuation and tolerance values available.

2245 Fortune Drive, San Jose, CA 95131 Phone: (408) 433-1941 Fax: (408) 433-1943

	CAGE CODE 0NR42	100W 30dB Attenuator	
		Dwg. No: 2A100300	Rev. B