


HIGH POWER BRAZED ATTENUATOR


2J150060

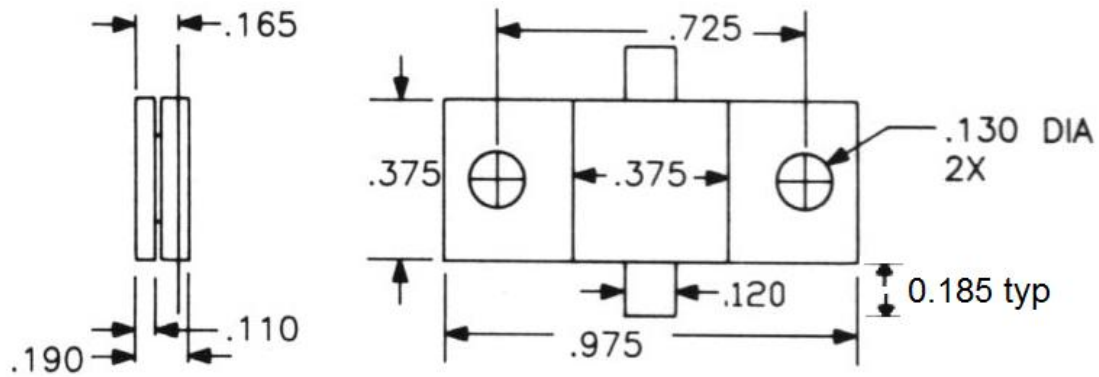

Electrical Specifications		Material Specifications		General Specifications	
RFT P/N	2J150060	Substrate	BeO	Mechanical Tolerance	±.010"
Power (Watt)	150	Flange	Copper with Nickel Plating	Tolerance (dB)	DC – 1 GHz: ± .5 1-2GHz: ± 1
Attenuation (dB)	6	Tab	Nickel with Silver plating	Power Handling	150@ 100°C 0 W @ 250 °C
Frequency (GHz)	2	Cover	Alumina	Construction	Brazed
VSWR	DC – .5 GHz: 1.25:1 .5 – 1 GHz: 1.35:1 1-2 GHz: 1.5:1	Resistive Element	NiChrome	RoHS Compliance	Yes

All dimensions are in inches. Other attenuation and tolerance values available.

2245 Fortune Drive, San Jose, CA 95131 Phone: (408) 433-1941 Fax: (408) 433-1943

	CAGE CODE 0NR42	150W 6dB Attenuator	
		Dwg. No: 2J 150060	Rev. B