


HIGH POWER BRAZED ATTENUATOR


2Z020010

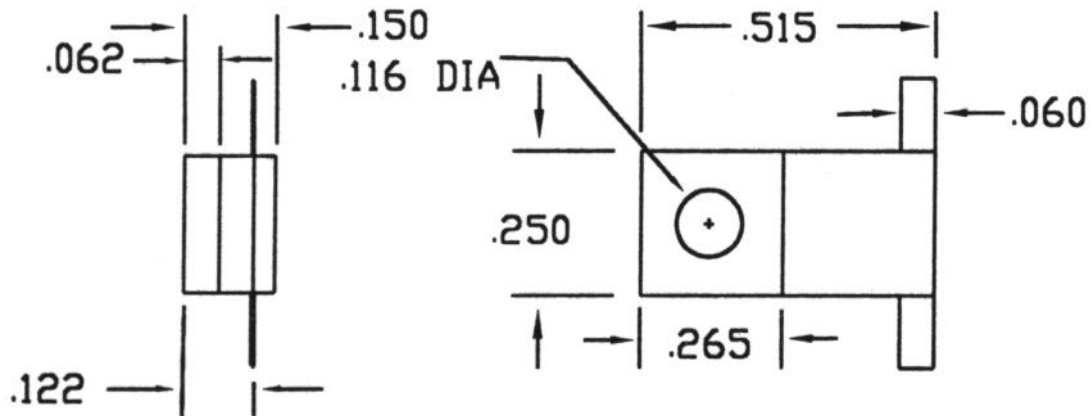


Electrical Specifications		Material Specifications		General Specifications	
RFT P/N	2Z020010	Substrate	BeO	Mechanical Tolerance	±.010"
Power (Watt)	20	Flange	Copper with Nickel Plating	Tolerance (dB)	DC – 1 GHz: ± .5 1-2GHz ± 1
Attenuation (dB)	1	Tab	Nickel with Silver plating	Power Handling	20@ 100°C 0 W @ 250 °C
Frequency (GHz)	2	Cover	Alumina	Construction	Brazed
VSWR	DC – 1 GHz: 1.25:1 1-2 GHz:1.35:1	Resistive Element	NiChrome	RoHS Compliance	Yes

All dimensions are in inches. Minimum lead length 0.125". Other attenuation and tolerance values available.

2245 Fortune Drive, San Jose, CA 95131 Phone: (408) 433-1941 Fax: (408) 433-1943

	CAGE CODE 0NR42	20W 1dB Attenuator	
		Dwg. No: 2Z020010	Rev. A

2245 Fortune Drive, San Jose, CA 95131 Phone: (408) 433-1941 Fax: (408) 433-1943

	CAGE CODE 0NR42	20W 1dB Attenuator	
		Dwg. No: 2Z020010	Rev. A