


HIGH POWER CHIP ATTENUATOR


A2253504A-300

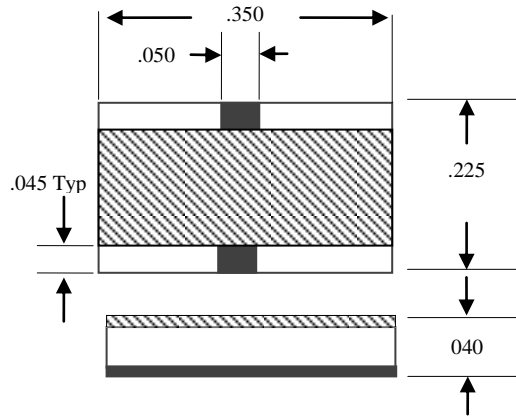

Electrical Specifications		Material Specifications		General Specifications	
RFT P/N Marking	None	Substrate	AlN	Mechanical Tolerance	±.010"
Power (Watt)	100	Terminals	Platinum Silver	Tolerance (dB)	DC – 1 GHz: ± .5 1-2 GHz: ± 1
Attenuation (dB)	30	Resistive Element	Thick Film	Power Handling	100@ 100°C 0 W @ 150 °C
Frequency (GHz)	2	Tab	None	Operating	-55°C TO +150°C.
VSWR	DC – 1 GHz: 1.20:1 1-2 GHz: 1.35:1	Cover	None	RoHS Compliance	Yes

All dimensions are in inches lead length 0.185". Other attenuation and tolerance values available.

2245 Fortune Drive, San Jose, CA 95131 Phone: (408) 433-1941 Fax: (408) 433-1943

	CAGE CODE 0NR42	100W 30 dB Chip Attenuator	
		Dwg. No: A2253504A-300	Rev. A