


HIGH POWER RESISTOR


S1L125A100

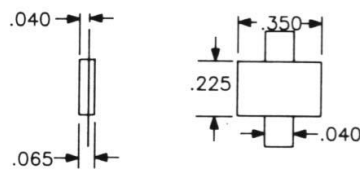

Electrical Specifications		Material Specifications		General Specifications	
RFT P/N	S1L125A100	Substrate	Aluminum Nitride	Mechanical Tolerance	±.010"
Power (Watt)	125	Backside	Platinum Silver	Resistance Tolerance	±5%
Resistance (Ohm)	100	Tab	Nickel with Silver plating	Power Handling	125 W @ 100°C 0 W @ 180°C
Frequency (GHz)	3	Cover	Alumina	Construction	Lead free solder
Capacitance (pF Typical)	0.8	Resistive Element	Thick Film	RoHS Compliance	Yes with Electronic exemption

All dimensions are in inches. Minimum lead length 0.125". 1% & 2% resistance tolerance available. Other resistance values available.

2245 Fortune Drive, San Jose, CA 95131 Phone: (408) 433-1941 Fax: (408) 433-1943

	CAGE CODE 0NR42	125W 100 Ohm Resistor	
		Dwg. No: S1L125A100	Rev. A