


# HIGH POWER BRAZED ATTENUATOR


## 2J250040

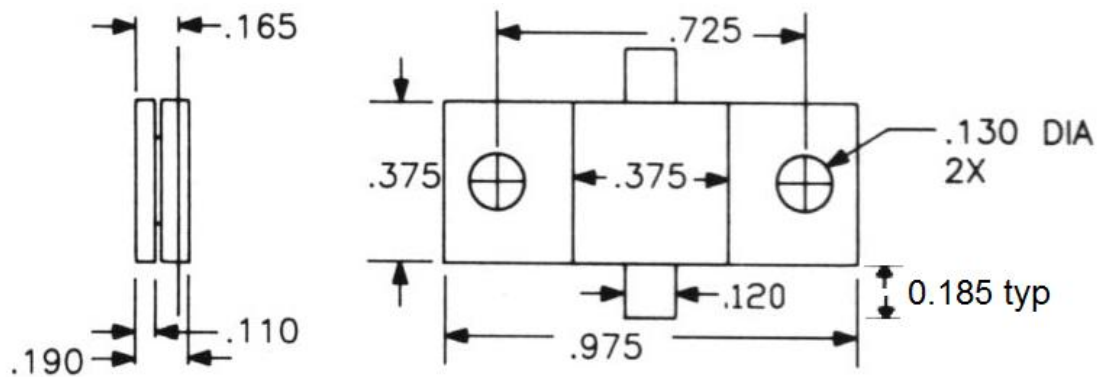

Electrical Specifications		Material Specifications		General Specifications	
<b>RFT P/N</b>	2J250040	<b>Substrate</b>	BeO	<b>Mechanical Tolerance</b>	±.010"
<b>Power (Watt)</b>	250	<b>Flange</b>	Copper with Nickel Plating	<b>Tolerance (dB)</b>	DC – 1 GHz: ± .5
<b>Attenuation (dB)</b>	4	<b>Tab</b>	Nickel with Silver plating	<b>Power Handling</b>	250@ 100°C 0 W @ 250 °C
<b>Frequency (GHz)</b>	2	<b>Cover</b>	Alumina	<b>Construction</b>	Brazed
<b>VSWR</b>	DC – .5 GHz: 1.25:1 .5 – 1 GHz: 1.35:1	<b>Resistive Element</b>	NiChrome	<b>RoHS Compliance</b>	Yes

All dimensions are in inches. Other attenuation and tolerance values available.

2245 Fortune Drive, San Jose, CA 95131 Phone: (408) 433-1941 Fax: (408) 433-1943

	CAGE CODE 0NR42	<b>250W 4dB Attenuator</b>	
		Dwg. No: 2J250040	Rev. B