


HIGH POWER BRAZED TERMINATION


3VL20050

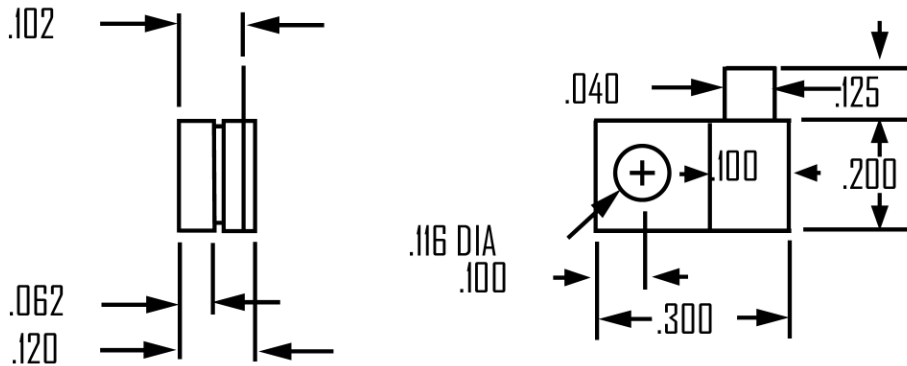

Electrical Specifications		Material Specifications		General Specifications	
RFT P/N Marking	50	Substrate	BeO	Mechanical Tolerance	±.010"
Power (Watt)	20	Backside	Copper with Nickel Plating	Tolerance	±5%
Resistance (Ohm)	50	Tab	Nickel with Silver plating	Power Handling	20 W @ 100°C 0 W @ 250°C
Frequency (GHz)	2	Cover	Alumina	Construction	Brazed
VSWR	DC – 2 GHz: 1.25:1	Resistive Element	NiChrome	RoHS Compliance	Yes

All dimensions are in inches. Minimum lead length is 0.125". Call for other values. 1% & 2% resistance tolerances available.

2245 Fortune Drive, San Jose, CA 95131 Phone: (408) 433-1941 Fax: (408) 433-1943

	CAGE CODE 0NR42	20W 50 Ohm Termination	
		Dwg. No:3SVL20050	Rev. A